


LED Light Arrow LP 15

- High-grade steel frame with 15 energy-efficient light arrow lamps (220 mm) with only one LED each
- With light cross for use on hard shoulders
- Automatic day/night adaptation
- Optionally with 2-fold warning light system 340 mm
- Up to 2 switching outputs for additional equipment (working lights, front flashers etc.)
- Also available with motor-driven lifting/lowering device
- With cable remote control Eco-Remote II
- Approved according to EMC directive
- Optionally GPS



Light colour
yellow

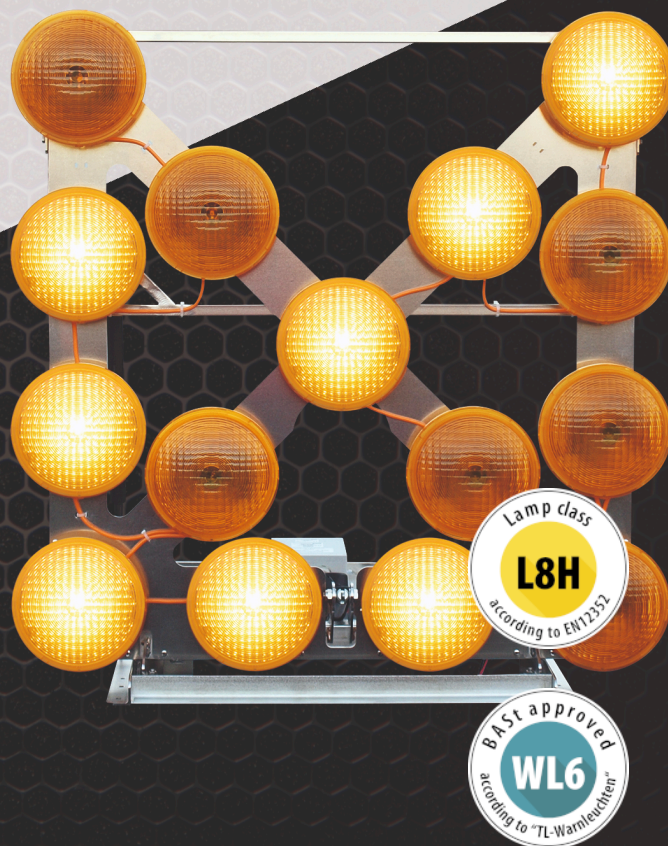

Max. light intensity
2200 cd



Eff. light intensity
1500 cd



Av. power consumpt. day
1.2 A



Operating voltage
12/24V



Dimensions (LxWxH)
1230 x 1075 x 228 mm
(depending on version)



Dimensions (HxWxD)
1230 x 1075 x 228 mm
(je nach Ausführung)



Weight
with roof frame 50 kg


LED Light Arrow LP 15

Order number

LED Light Arrow Type LP 15 wall mounting, with cable remote control Eco-Remote II	129473-401
LED Light Arrow Type LP 15 wall mounting, with twofold system Multilight 340 LED and cable remote control Eco-Remote II	129473-402
LED Light Arrow Type LP 15 wall mounting, with radio remote control Radio-Remote II	129473-501
LED Light Arrow Type LP 15 Kompakt with roof frame and lifting/lowering device, with cable remote control Eco-Remote II	129473-601
LED Light Arrow Type LP 15 Kompakt with roof frame, twofold system Multilight 340 LED and lifting/lowering device, with cable remote control Eco-Remote II	129473-602
LED Light Arrow Type LP 15 Kompakt with roof frame and lifting/lowering device, with Radio-Remote II	129473-701
LED Light Arrow Type LP 15 Kompakt with roof frame, twofold system Multilight 340 and lifting/lowering device, with Radio-Remote II	129473-702

Operating time with a battery pack

With rechargeable battery 12 V, 180 Ah	180 hrs
With rechargeable battery 12 V, 230 Ah	230 hrs

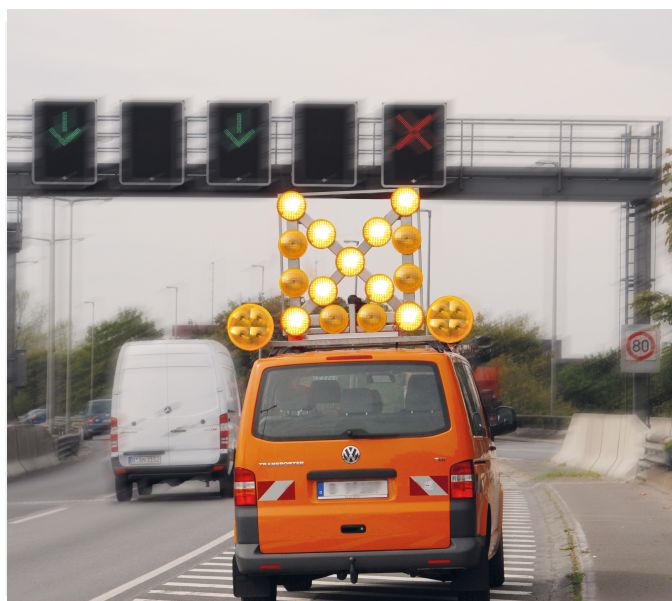

Further information
NIS-01222
Entry on nissen-germany.com

Verification number:
V3-24-2013