

LED Light Arrow LP 15 Slider

• Speeds up to 80 km/h with lifted arrow, up to 120 km/h with lowered arrow

• Hardly any additional fuel consumption compared with conventional roof frames

Reduced wind noise due to mounting behind the vehicle cabin


 Up to 2 switching outputs for additional equipment (working lights, front flashers etc.)

St approv

• Automatic day/night adaptation

Optional GPS



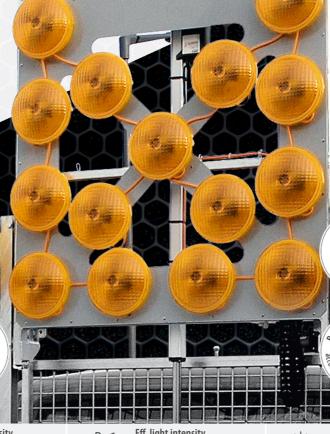





Light colour amber



Max. light intensity



Eff. light intensity 1500 cd



Av. power consumpt. day



Operating voltage 12/24 V



Dimensions (HxWxD) 350 x 1212 x 2310 mm (depending on version)

Order number

129474-003

081651-22



Weight 95 kg (depending on version)

LED Light Arrow LP 15 Slider

LED Light Arrow Type LP 15 Slider 129474-001 on vertically liftable warning board with cable remote control Eco-Remote II

LED Light Arrow Type LP 15 Slider on vertically liftable warning board with twofold warning light system Multi-Light 340 LED (bottom)

Complete cover for lower frame of vertically liftable warning board

with cable remote control Eco-Remote II

Accessories and Spare parts Order number

Partial cover for lower frame of vertically liftable warning board

Eco Remote II cable remote control

with 14 m cable and LP 15 holder

2886-40





Further information
NIS-01227
Entry on nissen-germany.com