

LED-Variable Message Sign

ProLine SMD

- Robust plastic housing - resists heavy use
- High visibility even in bright daylight thanks to the anti-reflective lens
- Good recognizability of the signs from almost every angle
- Variable message signs in LED technology in up to 4 colours (red, white, blue, yellow)
- Automatic brightness adjustment (continually 5-100%)
- Lighting design according to EN 12966
- Mounting by threaded bushes on the back



	Operating voltage 12/24V		Light source LED		LED/m² 2.500 pieces		Dimensions housing 840 x 840 mm
	Weight about 20 kg		LED-grid 20 mm		LED-display area 720 x 720 mm		character size symbols Circle/triangle: 750 mm

LED-Variable Message Sign ProLine SMD

Order number

LED-VMS VarioSign ProLine SMD
2x2K-360, red/white, black plastic housing, width 840 x 840 mm
(Other sizes/ versions on request)


229290-22-213

Accessories and Spare parts

Order number

Software for free programming
Remote Control Pro Remote II
(Touch) radio/cable, illuminated keypad
Eco Remote II cable remote control
with 14 m cable and LP 13 holder
Remote Control Touch Remote Colour, radio/cable with charging tray,
14 m connection cable

295500-1
129266-51
129266-53
129286-51

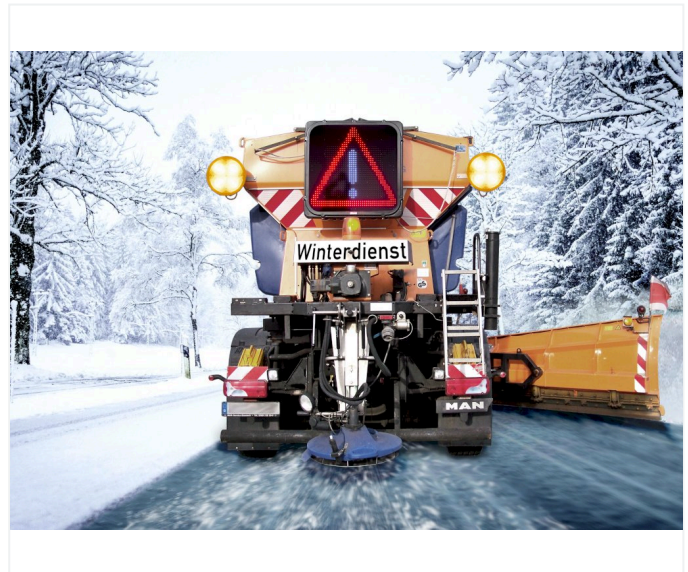

Further information
NIS-03328
Entry on nissen-germany.com